



ES3-6

SPECIFICATIONS

Nominal Voltage (V) 6V

Nominal Capacity

20 hour rate (0.15A to 5.25V)	3Ah
10 hour rate (0.285A to 5.25V)	2.85Ah
5 hour rate (0.51A to 5.1V)	2.55Ah
1C (3A to 4.80V)	1.7Ah
3C (9A to 4.80V)	1.2Ah

Weight Approx. 1.54Lbs. (700g)

Internal Resistance (at 1KHz) Approx. 18 mΩ

Maximum Discharge Current for 5 seconds : 45A

Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 months	90%
6 months	80%

Charging Methods at 25°C (77°F)

Cycle Use : Charging Voltage 7.20 to 7.50V
Maximum Charging Current : 0.9A
Coefficient -5.0mv / °C / cell

Standby Use : Float Charging Voltage 6.75 to 6.90V
Coefficient -3.0mv / °C / cell


Case Material : ABS
(Option : UL94 HB Flame Retardant Case Material)

Terminal : F1



Maintenance-Free Rechargeable Sealed Lead-Acid Battery



DIMENSIONS



F1 (Faston Tab 187)

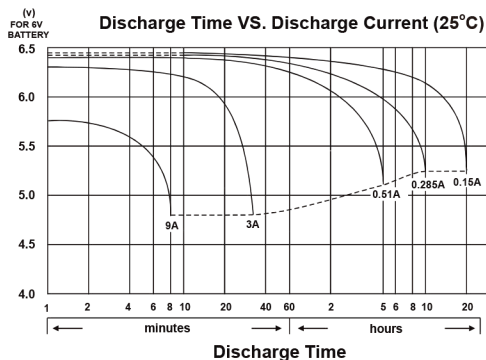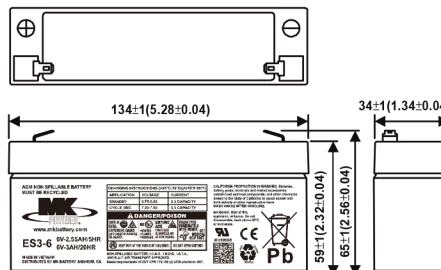

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址：香港九龍旺角彌敦道610號荷李活商業中心18樓

電話：2960 0193 郵箱：cmli@live.hk

傳真：2960 0553 網址：http://www.hkre.com.hk/