



ES1.2-6

SPECIFICATIONS

Nominal Voltage (V) 6V

Nominal Capacity

20 hour rate (0.06A to 5.25V)	1.2Ah
10 hour rate (0.114A to 5.25V)	1.14Ah
5 hour rate (0.204A to 5.1V)	1.02Ah
1C (1.2A to 4.80V)	0.68Ah
3C (3.6A to 4.80V)	0.48Ah

Weight Approx. 0.65Lbs. (0.30kg)

Internal Resistance (at 1KHz) Approx. 41 mΩ

Maximum Discharge Current for 5 seconds : 18A

Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 months	90%
6 months	80%

Charging Methods at 25°C (77°F)

Cycle Use : Charging Voltage 7.20 to 7.50V
Coefficient -5.0mv / °C / cell
Maximum Charging Current : 0.36A

Standby Use : Float Charging Voltage 6.75 to 6.90V
Coefficient -3.0mv / °C / cell




Case Material : ABS
(Option : UL94 HB Flame Retardant Case Material)

Terminal : F1

Maintenance-Free Rechargeable Sealed Lead-Acid Battery



DIMENSIONS

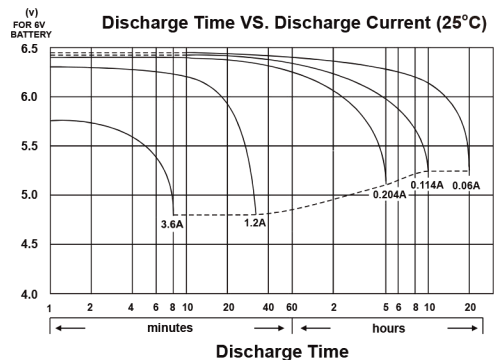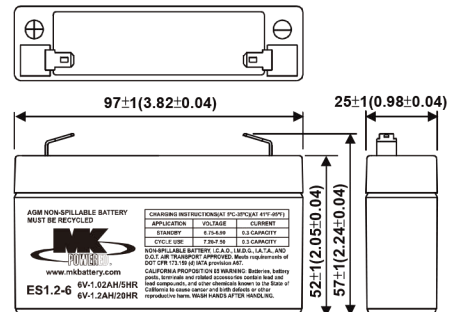

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址：香港九龍旺角彌敦道610號荷李活商業中心18樓

電話：2960 0193

郵箱：cmli@live.hk

傳真：2960 0553

網址：http://www.hkre.com.hk/