


E31 SLD G ST

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	108 Ah
Capacity at C/20	97.6 Ah
Capacity at C/5	80.5 Ah
Weight	68.5 lbs. (31 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle	13.8 - 14.6 volts
Float	13.4 - 13.6 volts
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	X (STUD)



Torque values:

60 in lb
5 ft lb
6 nM

Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	12.93 (329 mm)
Width	6.74 (171 mm)
Height	9.33 (237 mm) <i>Including terminal</i>

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

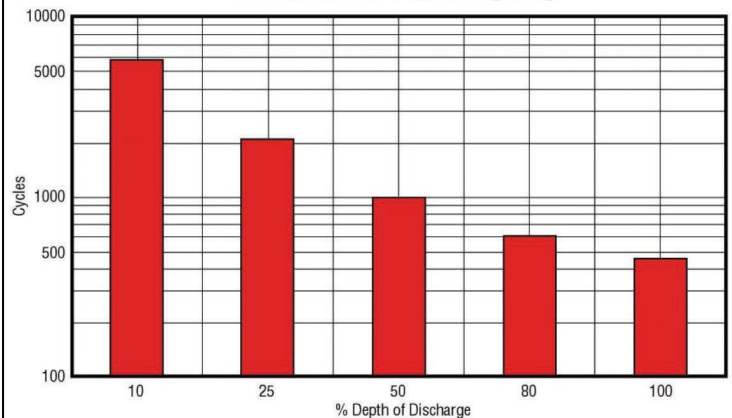

Authorized Agent:



香港可再生能源有限公司
Hong Kong Renewable Energy Co. Ltd.

地址：香港九龍旺角彌敦道610號荷李活商業中心18樓

電話：2960 0193

郵箱：cml@live.hk

傳真：2960 0553

網址：<http://www.hkre.com.hk/>